

EIS-2208 2U 19" Rackmount Industrial Server with Intel® C612

Brief Introduction

EIS-2208 is an industrial server based on Intel® C612 platform. It supports dual socket Intel® Xeon® E5-2600 V3/V4 series processor. EIS-2208 support onboard LSI RAID, professional IPMI remote management and multiple OS including: Win7 64bit, Win8.1, Win10, WinServer 2008R2, WinServer 2012R2, WinServer2016, Vmware vSphere 5.5 update 3 and above, RedHat® Enterprise Linux, Cent OS Linux and etc.

EIS-2208 is built by high quality sheet metal structure which ensure high reliability operation environment with good thermal design and vibration resistance performance.

EIS-2208 is widely used in enterprise WEB application, printing, virtualization, information security, and surveillance.



Features

Based on Intel® C612

Support dual socket Intel® Xeon® E5 2600 V3/V4 CPU


Support 16 x DDR4 DIMMs, up to 1TB RDIMM ECC

Support 8 x 3.5" HDD bay drawabe, 2 x 2.5" SSD bay internal

Support 8 x PCIE expansion

Support ATX and redundant PSU

Product size chart

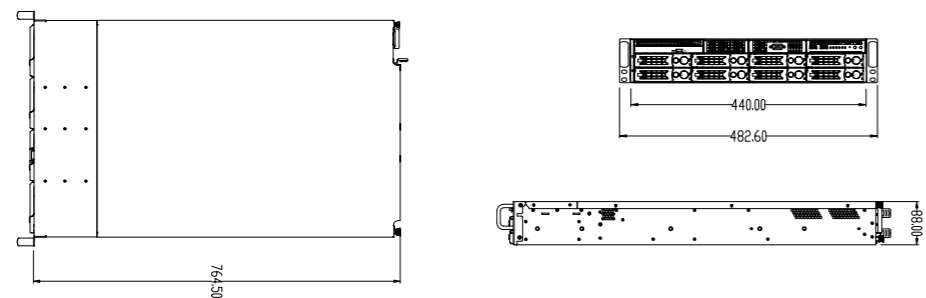

(Company : MM)

Specifications

Items		Specification
System	CPU	Support dual socket Intel® Xeon® E5-2600 V3/V4 series
	Chipset	Intel® C612
Memory		16 x 288PIN DDR4 DIMMs, support RDIMM and LRDIMM Up to 512GB (RDIMM), 2TB (LRDIMM)
Storage	SATA	8 x 2.5"/3.5" drawabe SATA/SAS bay 2 x 2.5"/3.5" drawabe SATA bay Optional 4 x 2.5" SATA HDD/SSD internal
	ODD	1 x slim DVD-ROM optional
LAN		2/4 x 10/100/1000Mbps RJ45, LAN1 support Wake-On-Lan 1 x IPMI, support Wake-On-Lan and system management
Expansion		2 x PCIe16, support half-size add-on card 6 x PCIe8, support half-size add-on card
I/O	VGA	1 x VGA
	COM	1 x DB9 RS232
	USB	2/4 x USB 3.0, 2 x USB 2.0
	IPMI	1 x IPMI
LCD Module		Support information display including: CPU temperature, system temperature, Vcore, fan speed
Power Supply		AC 110V ~ 240V, support ATX and redundant PSU
Mechanical	Dimensions (W x H x D)	440 x 88 x 764.5 mm
	Weight	21.8kg
	Installation	Rack mount
EMC&Safety		Meet CE, CCC
OS Support		WinServer 2008R2/2012R2/2016, Linux

Ordering Information

P/N	Model	Description
0020-062691	EIS-2208/SVE-2902 1200W barebone	EVOC 2U industrial server/C612/16 x DIMMs/8 x 3.5" SATA bay/2 x LAN/6 x USB/1 x COM/2 x VGA/ 1 x IPMI/8 x PCIE/1200W ATX
0020-062701	EIS-2208/SVE- 2602VD 800W barebone	EVOC 2U industrial server/C612/16 x DIMMs/8 x 3.5" SATA bay/2 x LAN/6 x USB/1 x COM/2 x VGA/ 1 x IPMI/8 x PCIE/800W ATX PSU
0010-111451	EIS-2208-R	EVOC 2U industrial server/1 x E5-2620 V4/8G DDR4/2 x 1TB HDD/2 x LAN/6 x USB/1 x COM/2 x VGA/1 x IPMI/8 x PCIE/800W redundant PSU
0010-111441	EIS-2208-R	EVOC 2U industrial server/1 x E5-2650 V4/2 x 8G DDR4/2 x 1TB HDD/2 x LAN/6 x USB/1 x COM/2 x VGA/1 x IPMI/8 x PCIE/800W redundant PSU
0010-111421	EIS-2208	EVOC 2U industrial server/2 x E5-2620 V4/2 x 16G DDR4/1 x 1TB HDD/2 x LAN/6 x USB/1 x COM/2 x VGA/1 x IPMI/8 x PCIE/1200W ATX PSU
0010-111431	EIS-2208	EVOC 2U industrial server/C612/16 x DIMMs/8 x 3.5" SATA bay/2 x LAN/6 x USB/1 x COM/2 x VGA/ 1 x IPMI/8 x PCIE/800W ATX PSU