



# EIS-2209B

## 2U Rackmount Industrial Grade Server

- Intel® Purley platform, C621 chipset
- Support Intel® 2<sup>nd</sup> Gen Xeon® Scalable Processors
- Provide 24 x DDR4 RDIMMs/LRDIMMs
- Provide 12 x 3.5" drawable HDD/SSD bay
- Provide 4 x U.2 SSD
- Provide 8 x PCIe 3.0 expansion
- Support RAID 0,1,10,5,6,50,60
- Support OEM/ODM




### Specifications

<b>CPU Sockets</b>	2
<b>CPU Model</b>	Intel® 2 <sup>nd</sup> Gen Xeon® Scalable Processors
<b>Chipset</b>	Intel® C621
<b>Memory</b>	24 x 288 pin DDR4 DIMM, support RDIMM/LRDIMM, up to 3TB
<b>Local Storage</b>	1, Provide 8 x SAS/SATA 3.5"/2.5" HDD/SSD and 2 x internal 2.5" SSD (optional) 2, Provide 12 x SAS/SATA 3.5"/2.5" HDD/SSD (including 4*U.2) and 2 x rear 2.5" SSD (drawable)
<b>RAID Support</b>	RAID 0,1,10,5,50,6,60 optional
<b>Onboard Network</b>	Optional 4 x GbE LAN port (i350), 1 x BMC support IPMI, SOL, KVM over IP
<b>I/O Expansion</b>	1, Support 8 x PCIe slots, including 1 x RAID slots, support up to 2 x dual slot GPU or 6 x single slot GPU 2, Support 5 x PCIe slots, including 1 x RAID slot, 1 x PCIe16, 3 x PCIe8, 4 x U.2
<b>Integrated I/O Ports</b>	Front: 2 x USB 2.0, 1 x VGA Rear: 4 x USB 3.0, 1 x VGA (optional), 1 x COM
<b>Management</b>	Onboard BMC, supports IPMI/SOL/KVN Over IP/Virtual Media
<b>Operation System Support</b>	Windows Server Red Hat Enterprise Linux 6 SUSE Linux Enterprise Server 11 Citrix XenServer Vmware ESXi
<b>Power Supply</b>	Supports 550W/800W/1200W redundant power supply
<b>Working temperature</b>	0°C ~ 40°C
<b>Dimensions (W×H×D)</b>	440 × 88 × 785 mm



Dimension

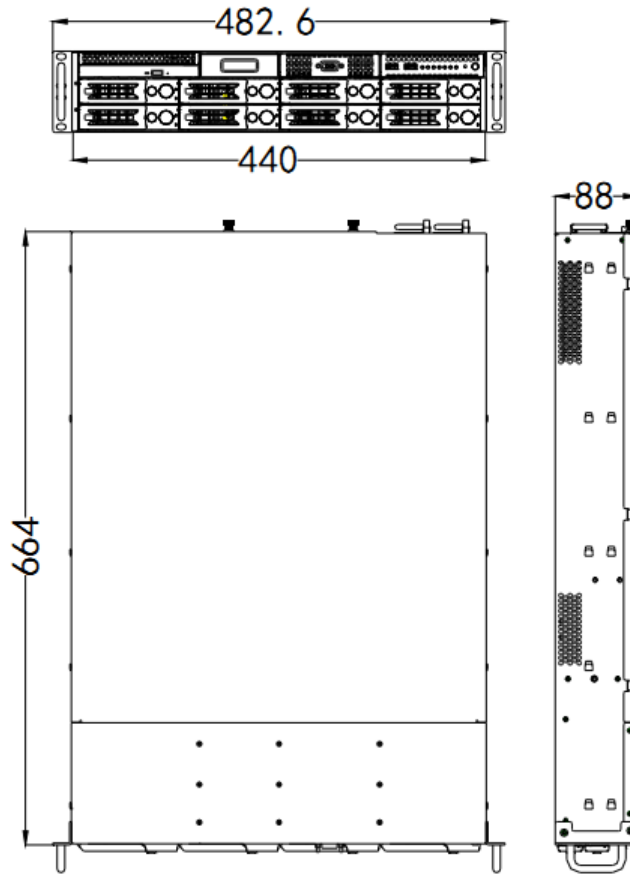

Unit:mm

Ordering Information

Number	Model Number	Description
1	EIS-2209B barebone/8*disk	Barebone system/Support 2*Xeon Cascade Lake CPU/24*DDR4 DIMM/ 8*3.5"/2.5" drawble HDD/SSD bay/4*GbE/1*COM/2*VGA/4*USB/ 8*PCIE/800W redundant PSU
2	EIS-2209B/8*disk	2U industrial server/C621/2*4210R CPU/2*16GB/3*1TB 3.5" enterprise HDD/1*LSI936I-8I/ 4*GbE/1*COM/2*VGA/4*USB/8*PCIE/800W redundant PSU
3	EIS-2209BH barebone/12*disk	Barebone system/Support 2*Xeon Cascade Lake CPU/24*DDR4 DIMM/ 12*3.5"/2.5" drawble HDD/SSD bay/4*GbE/1*COM/2*VGA/4*USB/ 5*PCIE/800W redundant PSU
4	EIS-2209H/12*disk	2U industrial server/C621/2*4214R CPU/2*16GB/3*1TB 3.5" enterprise HDD/1*LSI936I-8I/ 4*GbE/1*COM/1*VGA/4*USB/5*PCIE/800W redundant PSU
5	EIS-2209B/U barebone/12*disk	Barebone system/Support 2*Xeon Cascade Lake CPU/24*DDR4 DIMM/12*3.5"/2.5" drawble HDD/SSD bay, including 4 x U.2/Rear 2*2.5" drawble HDD/SSD bay/ 4*GbE/1*COM/2*VGA/5*PCIE/800W redundant PSU
6	EIS-2209B/U/12*disk	2U industrial server/C621/2*4214R/2*16GB/3*1TB 3.5" enterprise HDD/1*960GB U.2 SSD/ 2*LSI934I-8I/4*GbE/1*COM/1*VGA/4*USB/5*PCIE/800W redundant PSU